

# → DUCT HARDWARE

**SMOOTHFLO**  
PRODUCTS PTY LTD

For more information visit [www.smoothflo.com.au](http://www.smoothflo.com.au)

## General Product Specifications

### → Sash Fasteners:

- SFZ comprises hook and cam pressed from prime steel and zinc plated for long life
- SFC comprises a diecast hook and cam section coated with bright chrome finish. The cam section is fitted with a spring loaded locking mechanism to prevent accidental opening

### → Register Springs:

- RSL light duty
- RSM medium duty (zinc plated)
- RS40 light duty 40mm long

### → Quadrants:

- 90° quadrants manufactured from 1.2mm steel and zinc plated for long life
- Open and shut embossing both sides
- Can be used for left or right hand operation
- Available to suit 10mm and 12mm shafts

### → Access Door Handle Sets:

- Extra heavy duty handle sets complete with striker plate
- Shafts available to suit 25mm & 35mm thick doors

### → Access Door Hinges:

- Adjustable to ensure positive door seal
- Ultra strong zinc plated steel door hinges

Access door gasket extrusion also available - supplied in coils of 20m



## → DUCT HARDWARE

**SMOOTHFLO**  
PRODUCTS PTY LTD

For more information visit [www.smoothflo.com.au](http://www.smoothflo.com.au)

### General Product Specifications

#### → Damper Regulator Sets:

- Precision formed from heavy gauge galvanised steel
- Spring loaded bearing allows easy fitting
- Handle clearly indicates damper setting
- Will pierce and fix up to 20 gauge steel
- Rattle free
- Suitable for use up to 200°C
- Supplied in boxes of 100 pieces



#### → Vane Runner:

- Precision stamped from 22 gauge prime galvanised steel
- Ensures uniform and correct spacing of vanes in an elbow
- Extra deep form in rail ensures strong securing of vanes
- Vanes (rolled to form an arc) secured in seconds using only a hammer
- Supplied in 30.5mtr rolls



#### → Cable Ties:

- Non return locking action ensures permanent fixing
- Incredibly strong (75kg tensile strength minimum)
- Two or more may be joined for extra long jobs
- Fully adjustable from 10mm to 350mm
- Three sizes:
  - 810mm long secures up to 230mm dia
  - 1220mm long secures up to 350mm dia
  - 1535mm long secures up to 450mm dia



#### → Cable Tie Tensioning Tool:


(All metal construction)

Tightens and trims in one operation. Safe and easy to use with one handed operation.



#### → Anti-Vibration Pads (Waffle Pattern):

- Ideal for isolation of vibration and sound from pumps, fans, motors, air conditioners, fan coil units etc. in indoor, outdoor and rooftop installations
- Square cell pattern on both faces are staggered for uniform load distribution and deflection resistance
- Oil resistant, weather proof, excellent ageing properties
- Supplied in sheets 450mm<sup>2</sup> x 10mm thick
- Can laminate to metal for greater performance
- Recommended load range 3 to 7kg/sq cm

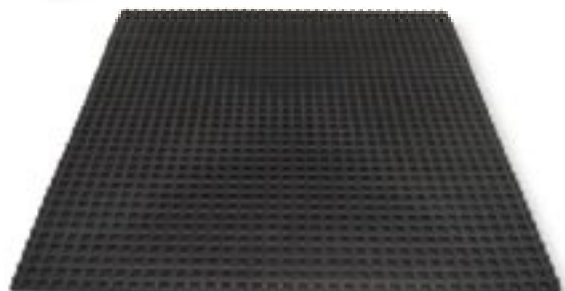

# → DUCT HARDWARE

**SMOOTHFLO**  
PRODUCTS PTY LTD

For more information visit [www.smoothflo.com.au](http://www.smoothflo.com.au)

## General Product Specifications

### → TDF and TDC Corners:

- Precision formed from 1.5mm prime galvanised steel
- Press formed reinforcing ribs for strength and rigidity
- External and internal edges formed to ensure positive lock into rollformed flange
- Square bolt hole allows for one spanner tightening using coach bolts
- Designed to assist in making an air tight seal
- Supplied in crates of 5000



### → Universal Duct Hanger Brackets:

- Extra strong brackets to suit 10mm and 12mm rod
- Prepunched rivet holes
- Zinc plated to resist corrosion
- Fabricated from 3mm mild steel to ensure maximum rigidity and strength
- Manufactured from prime steel and zinc plated
- E2 clip comes complete with welded 10mm nut for easy fitting



### → Splitter Damper Sets:

- 600mm gal rod, with set screw, hook and saddles

